


## MIL/MA-4025/A Battery

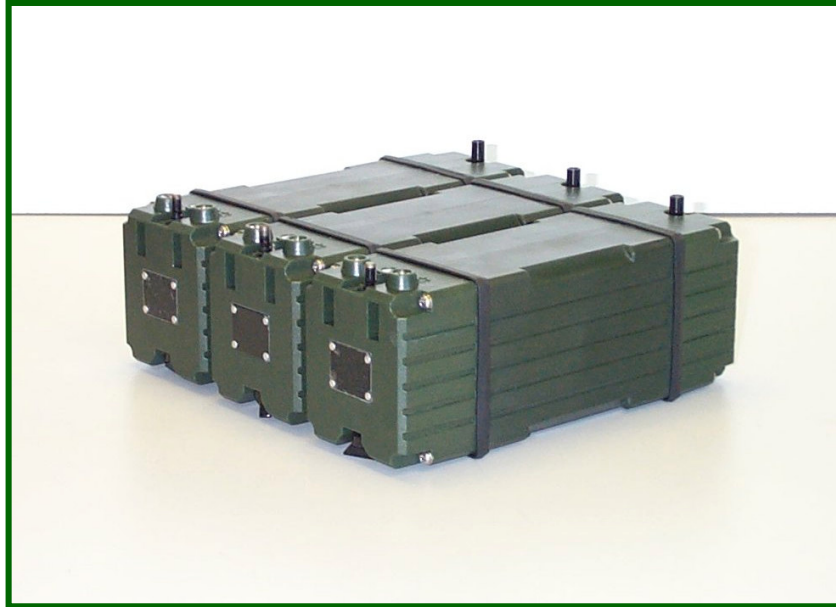

- High performance rechargeable nickel cadmium battery.
- Durable high impact plastic housing.
- High reliability due to all welded construction.
- Unit contains safety vented cells.

This battery is engineered and designed for use in a world wide tactical environment, and is manufactured to meet and exceed UK MOD and ISO9000 methods and procedures. This battery meets the requirements of MOD BAT 281 for:

Battery voltage

Capacity test

Electrolyte leakage

Mechanical and thermal shock

Vibration

Immersion

For use in	Jaguar V, Syncal 2000, Cougar
Replacement for	MA-4025A and MA-4025D, NSN 6140-99-780-8603
Cell chemistry	Nickel Cadmium
Nominal voltage	12Volts
Typical capacity	4.5Ah
Nominal dimensions	231 x 79 x 89mm
Nominal weight	1.7kg
Protection	Internal re-settable fuse and thermal switches, no external fuse
Case material	Nato green high impact engineering plastic
Operating temperature	-31°C to +55°C
Exposure temperature	-40°C to +70°C
Disposal	Battery must be recycled

**MIL Power Limited.**  
**Celtic House, 44 Ball Moor,**  
**Buckingham. MK18 1RQ**  
**England**

**Tel No. +44 (0) 1280 812402**

**Fax No. +44 (0) 1280 814169**

**MIL Power**

Email [sales@milpower.co.uk](mailto:sales@milpower.co.uk)

Web Page. [www.milpower.co.uk](http://www.milpower.co.uk)