


MIL/BA-5347/U Battery

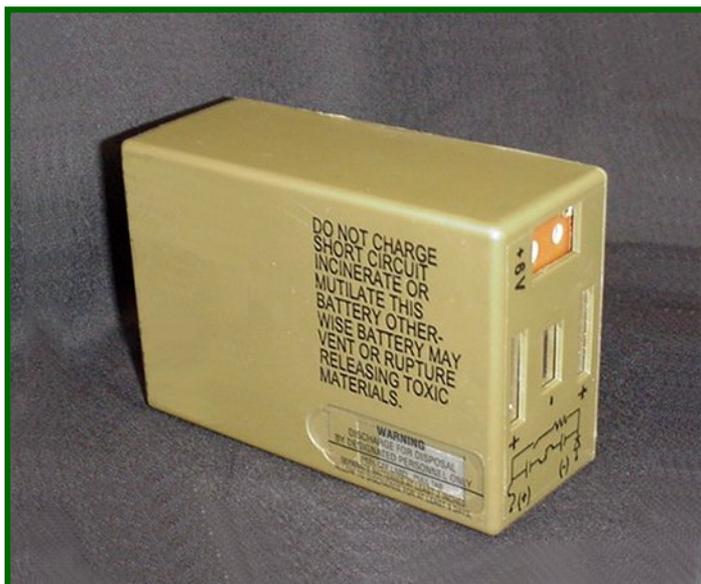

- High performance Lithium Manganese Dioxide battery.
- Durable plastic case
- High reliability due to multi spot welded intercell connections
- Unit contains safety devices (fuse, TCO, diode)

This battery is engineered and designed for use in a world wide tactical environment, and is manufactured to meet and exceed US MIL-SPEC and ISO9000 methods and procedures. This battery meets the requirements of MIL-B- 49471 with reference to MIL-STD-810 for:

Battery voltage

Capacity test

Electrolyte leakage

Mechanical and thermal shock

Vibration

Insulation resistance

For use in	PRM-34, PRS-7, TS-54
Replacement for	BA-5347/U
Cell chemistry	Lithium Manganese Dioxide
Nominal voltage	6.8V
Typical capacity	4.0Ah
Nominal dimensions	95 x 65 x 38mm
Nominal weight	1.8kg
Connector	2 hole socket and three flat contacts
Case material	ABS plastic
Case colour	green
Operating temperature	-20°C to +50°C
Storage temperature	-20°C to +50°C
Disposal	Check with local regulations for disposal

MIL Power Limited.
Celtic House, 44 Ball Moor,
Buckingham. MK18 1RQ
England

Tel No. +44 (0) 1280 812402

Fax No. +44 (0) 1280 814169

MIL Power

Email sales@milpower.co.uk

Web Page. www.milpower.co.uk